


DS-Foot

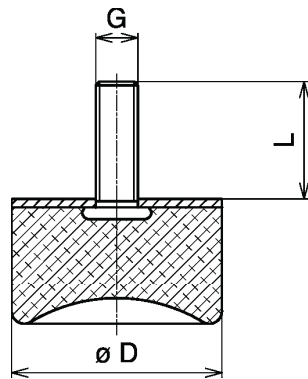

Part Number	Dia. x mm (Inch) (D) x (H)	Height	Thread (G)	Length mm (Inch) (L)	Thickness mm (Inch) (S)	Quality		Compression			
						ShoreA Duro	Elastomer	Max. Static Load		Spring Rate Ks	
								N	lbs	N/mm	lbs/in
1514DS	15 x 14 (.59) x (.55)		M4	13 (.51)	1.5 (.06)	57	NR	80	19	48	273
2017DS	20 x 17 (.79) x (.67)		M6	18 (.71)	2 (.08)	57	NR	159	35	71	398
2023DS	20 x 23.5 (.79) x (.93)		M6	18 (.71)	2 (.08)	57	NR	141	32	44	247
2518DS	25 x 18.5 (.98) x (.73)		M6	18 (.71)	2 (.08)	57	NR	261	58	106	596
3028DS	30 x 28.5 (1.18) x (1.12)		M8	20 (.79)	2 (.08)	57	NR	337	75	85	479
4028DS	40 x 28.5 (1.57) x (1.12)		M8	23 (.91)	2 (.08)	57	NR	668	150	168	949
5028DS	50 x 28 (1.97) x (1.10)		M10	33 (1.30)	2 (.08)	57	NR	1188	267	311	1755
7043DS	70 x 43 (2.76) x (1.69)		M10	30 (1.18)	3 (.12)	57	NR	2190	492	365	2064
7537DS	75 x 37 (2.95) x (1.46)		M12	37 (1.46)	3 (.12)	57	NR	2866	644	562	3175
1050DS	100 x 50 (3.94) x (1.97)		M16	45 (1.77)	4 (.16)	57	NR	5048	1134	732	4135