



TYPE B



Item	D	H	d	M x l	Stiffness 45 IRHD (kg/mm)	Stiffness 60 IRHD (kg/mm)	Stiffness 70 IRHD (kg/mm)	Max static deflection (mm)
1008VD10	10	8	M4	M4X10	4,0	7,3	10,3	1,6
1413VD10	14	13	M4	M4X10	3,7	7,3	10,1	2,6
1615VD10	16	15	M4	M4X10	4,6	8,5	11,8	3,0
2015VD18	20	15	M6	M6X18	7,8	7,8	7,8	3,0
2020VD18	20	20	M6	M6X18	4,5	8,4	11,6	4,0
2025VD18	20	25	M6	M6X18	3,1	5,6	8,0	5,0
2030VD18	20	30	M6	M6X18	2,1	3,8	5,3	6,0
2515VD18	25	15	M6	M6X18	15,4	29,2	40,8	3,0
2520VD18	25	20	M6	M6X18	10,3	18,8	25,0	4,0
2520VD20	25	20	M8	M8X20	10,3	18,8	25,0	4,0
2522VD20	25	22	M8	M8X20	8,2	15,6	20,6	4,4
2525VD18	25	25	M6	M6X18	6,1	11,4	15,7	5,0
2525VD20	25	25	M8	M8X20	6,1	11,4	15,7	5,0
2530VD18	25	30	M6	M6X18	4,4	8,5	11,1	6,0
2530VD20	25	30	M8	M8X20	4,4	8,5	11,1	6,0
3015VD20	30	15	M8	M8X20	20,9	30,3	53,6	3,0
3020VD20	30	20	M8	M8X20	13,1	22,4	33,1	4,0
3022VD20	30	22	M8	M8X20	11,1	19,4	26,7	4,4
3025VD20	30	25	M8	M8X20	8,3	14,3	19,5	5,0

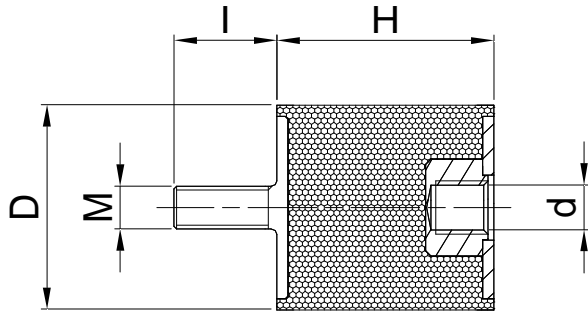