

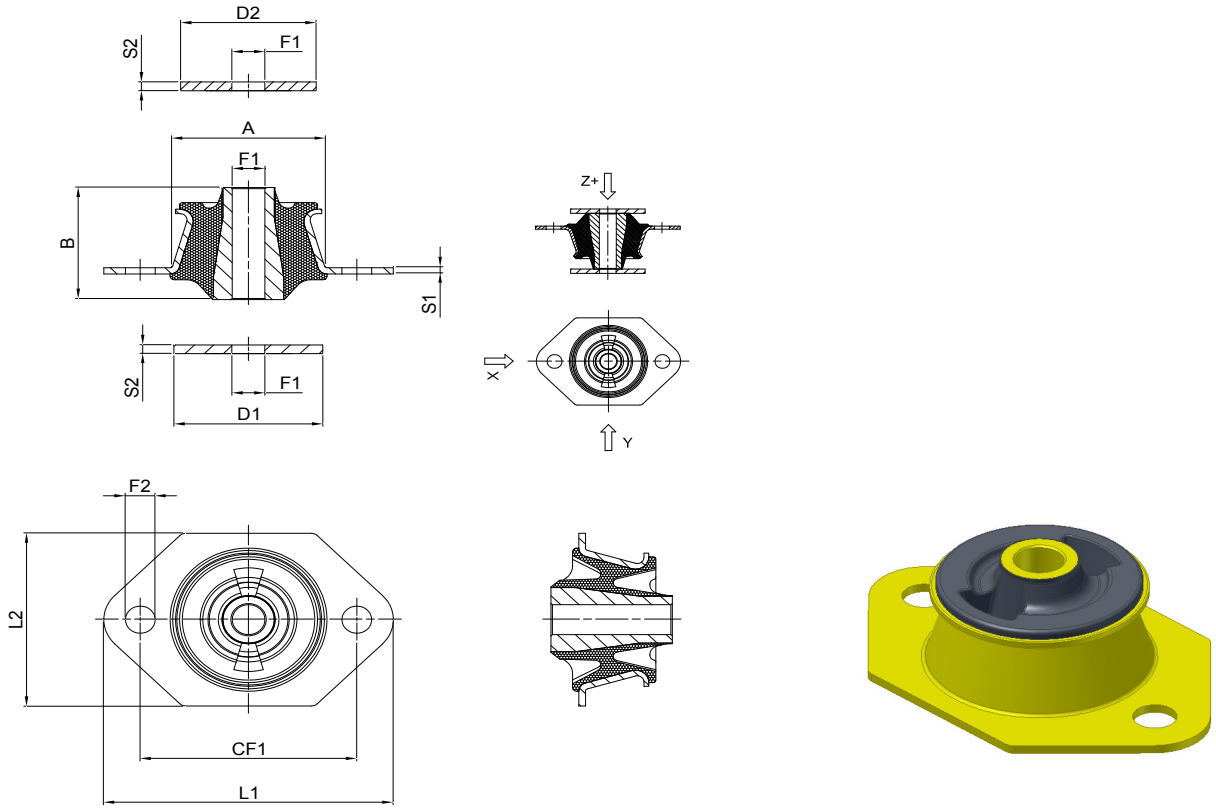
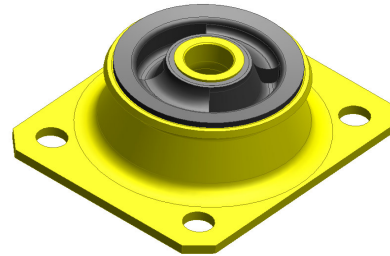
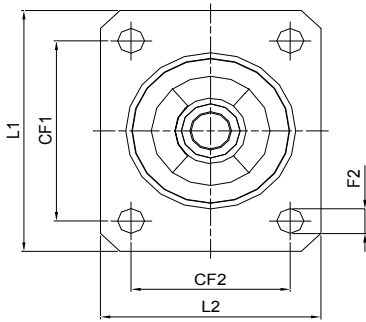


# TYPE CNA



Item	Hardness (IRHD)	Dimensions (mm)													Average Stiffness Z+ (Kg/mm)	Max. Load (Kg)	Max Deflec. (mm)	Average Stiffness X (Kg/mm)	Average Stiffness Y (Kg/mm)
		A	B	CF1	CF2	L1	L2	F1	S1	F2	D1	D2	F1	S2					
6051CNA12W	45 IRHD	60	45	80	-	107	70	12,1	2,5	11	55	50	12,2	3,5	15,5	77,5	5	5,3	3,1
6051CNA12M	60 IRHD	60	45	80	-	107	70	12,1	2,5	11	55	50	12,2	3,5	28	14	5	8,5	5,6
6051CNA12H	70 IRHD	60	45	80	-	107	70	12,1	2,5	11	55	50	12,2	3,5	40	20	5	12	8

# TYPE CNA

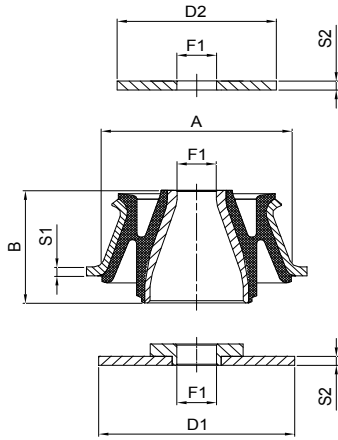

Item Fibet	Hardness (IRHD)	Dimensions (mm)												Average Stiffness Z+ (Kg/mm)	Max. Load (Kg)	Max Deflec. (mm)	Average Stiffness X (Kg/mm)	Average Stiffness Y (Kg/mm)	
		A	B	CF1	CF2	L1	L2	F1	S1	F2	D1	D2	F1						S2
7856CNA16W	45 IRHD	78	50	80	65	107	90	16.5	4	11	80	65	16	4	18	90	5	61	31
7856CNA16K	50 IRHD	78	50	80	65	107	90	16.5	4	11	80	65	16	4	28	140	5	71	36
7856CNA16M	60 IRHD	78	50	80	65	107	90	16.5	4	11	80	65	16	4	38	190	5	109	51