


TYPE D



Item	D	H	M x I	Stiffness 45 IRHD (kg/mm)	Stiffness 60 IRHD (kg/mm)	Stiffness 70 IRHD (kg/mm)	Max static deflection (mm)
0808VE06	8	8	M3X06	3.8	5.3	7.5	1.6
1008VE10	10	8	M4X10	4.8	7.0	9.8	1.6
1413VE10	14	13	M4X10	4.5	6.9	9.5	2.6
1508VE10	15	8	M4X10	15.5	22.8	31.5	1.6
1610VE10	16	10	M4X12	10.8	16.2	22.4	2.0
1610VE12	16	10	M5X12	10.8	16.2	22.4	2.0
1615VE10	16	15	M4X10	5.5	8.0	11.2	3.0
1620VE10	16	20	M4X10	3.2	4.7	6.6	4.0
1885VE18	18	9	M6X18	19.8	29.6	41.2	1.7
2008VE18	20	8	M6X18	23.3	34.0	47.0	1.6
2012VE18	20	12	M6X18	13.3	19.8	27.3	2.4
2015VE18	20	15	M6X18	9.1	13.7	18.9	3.0
2020VE18	20	20	M6X18	5.2	7.8	10.7	4.0
2025VE18	20	25	M6X18	4.3	6.6	9.0	5.0
2030VE18	20	30	M6X18	2.9	4.1	5.8	6.0
2508VE18	25	8	M6X18	57.0	95.0	115.5	1.6
2508VE20	25	8	M8X20	57.0	95.0	115.5	1.6
2510VE20	25	10	M8X20	42.6	62.0	85.4	2.0
2515VE18	25	15	M6X18	18.1	27.7	38.8	3.0

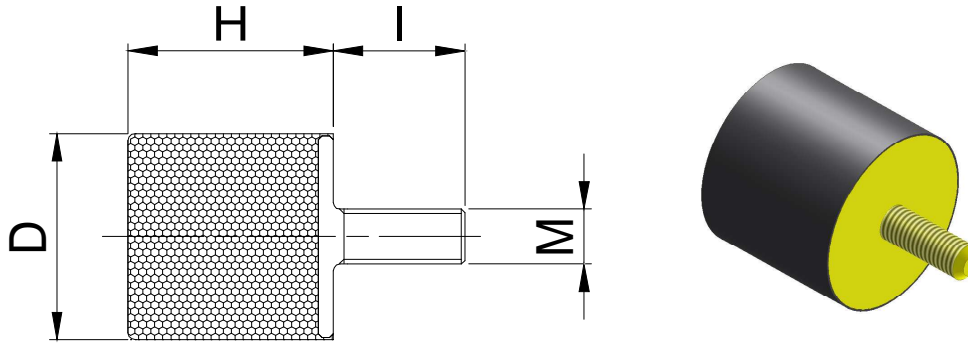