




# TYPE FBNA

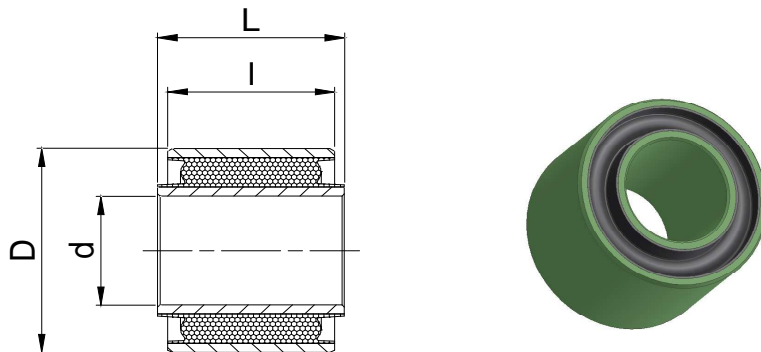

STANDARD 55 IRHD • STANDARD 65 IRHD

Item	d	D	l	L	RADIAL		AXIAL		TORSIONAL		CONICAL	
					Stiffness (daN/mm)	Deflec.max (mm)	Stiffness (daN/mm)	Deflec.max (mm)	Stiffness (Nm/°)	Angle.max (°gradi)	Stiffness (Nm/°)	Angle.max (°gradi)
					• FBNA1857.7086M	18	57	70	86	393	2,3	73
* FBNA2866.5569	28	66	55	69	234	2,1	43	2,8	5,86	20°	6,43	3°
* FBNA3882.7090	38	82	70	90	720	2,1	89	2,8	20,40	15°	30,32	1°
* FBNA4082.7090	40	82	70	90	732	1,9	90	4,0	20,46	15°	30,80	1°