


# Flex-Mounts

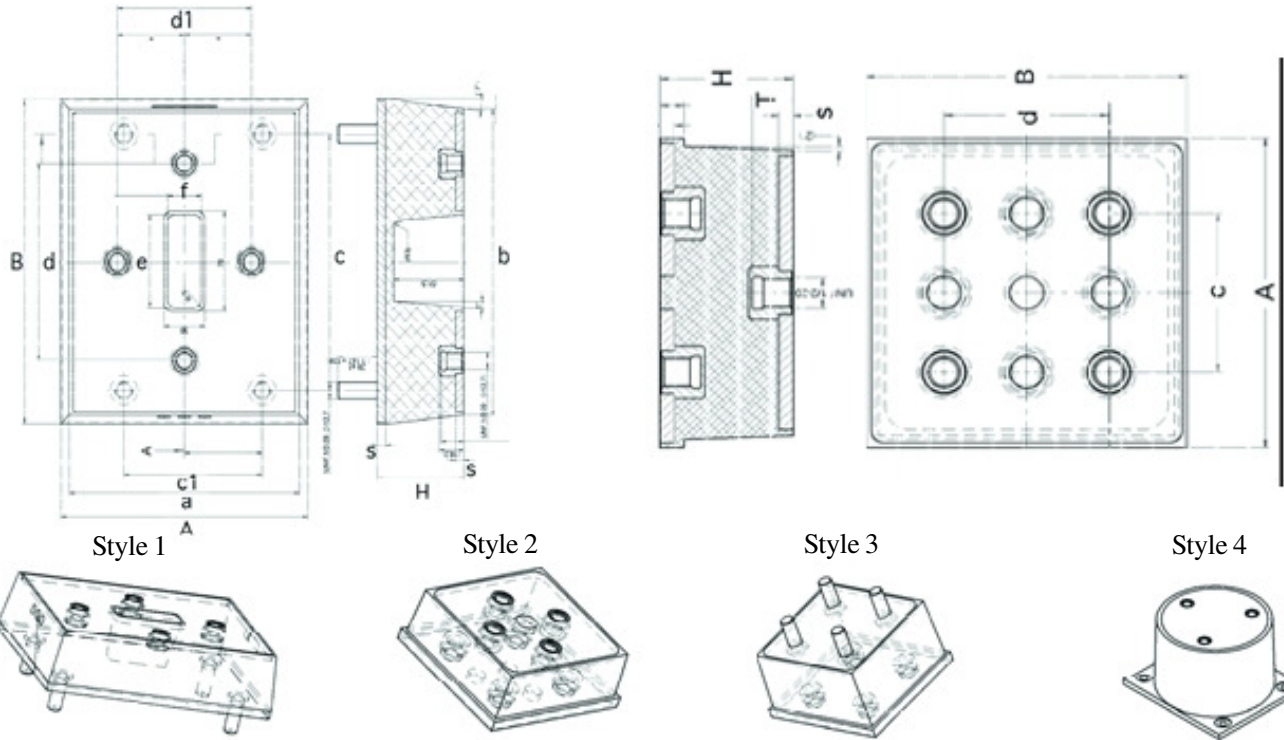

Part Number	Length x Height mm (Inch) (A) x (B)	Length (Inch) (B)	Hole Separation mm (Inch) (c)	Hole Separation mm (Inch) (d)	Threads	Thread Length mm (Inch)	Style	Quality		Max. Static Compression Force		Max. Static Shear Force	
								ShoreA Duro	Elastomer	kN	lbs	kN	lbs
A1305413001w A1305413001 A1305413001h	130 x 54 (5.12) x (2.13)	130 (.50)	66.7 (2.63)	66.7 (2.63)	UNF1/2-20	-	2	43 57 68	NR	<b>10.40</b> <b>19.10</b> <b>31.0</b>	2,338 4,294 6,969	<b>1.90</b> <b>3.60</b> <b>5.80</b>	427 809 1,304
A13054130w A13054130 A13054130h	130 x 54 (5.12) x (2.13)	130 (.50)	66.7 (2.63)	66.7 (2.63)	UNF1/2-20	28.8 (1.13)	3	43 57 68	NR	<b>10.40</b> <b>19.10</b> <b>31.0</b>	2,338 4,294 6,969	<b>1.90</b> <b>3.60</b> <b>5.80</b>	427 809 1,304
A130761001w A1307613001 A130761301h	130 x 76 (5.12) x (2.99)	130 (.50)	66.7 (2.63)	66.7 (2.63)	UNF1/2-20	-	2	43 57 68	NR	<b>7.70</b> <b>14.20</b> <b>23.0</b>	1,731 3,192 5,171	<b>1.90</b> <b>3.60</b> <b>5.80</b>	427 809 1,304
A10376130w A13076130 A13076130h	130 x 76 (5.12) x (2.99)	130 (.50)	66.7 (2.63)	66.7 (2.63)	UNF1/2-20	28.8 (1.13)	3	43 57 68	NR	<b>7.70</b> <b>14.20</b> <b>23.0</b>	1,731 3,192 5,171	<b>1.90</b> <b>3.60</b> <b>5.80</b>	427 809 1,304
XX163201w XX163201 XX163201h	181 x 63.5 (7.13) x (2.5)	229 (.50)	181 (7.13)	140 (5.51)	UNF1/2-20	-	1	43 57 68	NR	<b>30.0</b> <b>56.0</b> <b>91.0</b>	6,744 12,589 20,458	<b>4.70</b> <b>8.70</b> <b>14.10</b>	1,057 1,956 3,170
XX1632w XX1632 XX1632h	181 x 63.5 (7.13) x (2.5)	229 (.50)	181 (7.13)	140 (5.51)	UNF1/2-20	28.8 (1.13)	1	43 57 68	NR	<b>30.0</b> <b>56.0</b> <b>91.0</b>	6,744 12,589 20,458	<b>4.70</b> <b>8.70</b> <b>14.10</b>	1,057 1,956 3,170
XX1526	152 x 114 (5.98) x (4.49)	-	114 (4.49)	88 (3.46)	UNF1/2-20	-	4	57	NR	<b>21.0</b>	4,721	<b>4.70</b>	1,057