



ANTI VIBRATION BASE WITH VULCANIZED RUBBER ARTICULATED STEEL/STAINLESS STEEL SCREW 5°

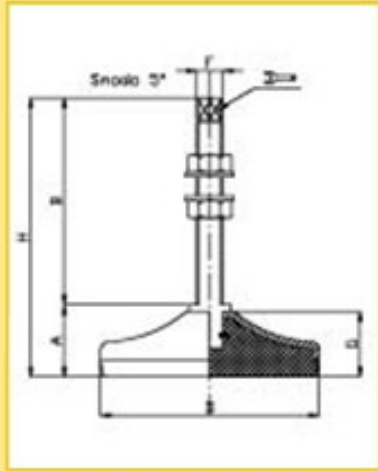

CODE	MAIN DIMENSIONS							DYNAMIC LOAD Lbs.	STATIC LOAD Lbs
	A	B	D		F	G	H		
28000Z	28	75	80	8	M12	25	103	560	1010
28000I	28	75	80	8	M12	25	103	560	1010
28020Z	28	100	80	9	M14	25	128	560	1010
28020I	28	100	80	9	M14	25	128	560	1010
28030Z	31	75	100	8	M12	28	106	1120	2020
28030I	31	75	100	8	M12	28	106	1120	2020
28040Z	31	125	100	9	M14	28	156	1120	2020
28040I	31	125	100	9	M14	28	156	1120	2020
28050Z	31	125	100	10	M16	28	156	1120	2020
28050I	31	125	100	10	M16	28	156	1120	2020

Code Z = galvanized steel

Code I = stainless steel

Material:

Stainless steel base AISI304; galvanized steel base C40

Pad: vulcanized rubber NBR 80 shore

Load values mentioned above refer to static conditions calculated at half of the screw length. In conditions of vibrations or in presence of dynamic loads these values should be reduced. We cannot accept responsibility for mounts that have been tampered or modified.