



**GALVANIZED STEEL PRESSED BASE (124mm/4.88in)  
WITH VULCANIZED RUBBER, ARTICULATED STEEL SCREW 8°**

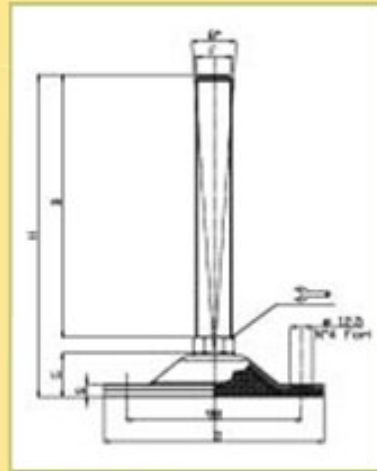

CODE	Description	MAIN DIMENSIONS							STATIC LOAD Lbs.
		S	B	D		F	G	H	
Galvanized Steel									
15600Z/V	M16X100	8	100	124	16	M16	23.5	132	4495
15604Z/V	M16X150	8	150	124	16	M16	23.5	182	4495
15608Z/V	M16X175	8	175	124	16	M16	23.5	207	4495
15612Z/V	M20X100	8	100	124	20	M20	23.5	132	4495
15616Z/V	M20X150	8	150	124	20	M20	23.5	182	4495
15620Z/V	M20X175	8	175	124	20	M20	23.5	207	4495
15624Z/V	M20X200	8	200	124	20	M20	23.5	232	4495
15628Z/V	M24X100	8	100	124	24	M24	23.5	132	4495
15632Z/V	M24X150	8	150	124	24	M24	23.5	182	4495
15636Z/V	M24X200	8	200	124	24	M24	23.5	232	4495
15640Z/V	M30X150	8	150	124	30	M30	23.5	183	4495
15644Z/V	M30X200	8	200	124	30	M30	23.5	233	4495
15648Z/V	M30X250	8	250	124	30	M30	23.5	283	4495

**Galvanized steel base. 4 fixing holes can be drilled if necessary.**

**Pad: vulcanized rubber NBR 80 shore**

**Galvanized steel screw. The leveling mount can be supplied with steel nut upon request.**

**Load values mentioned above refer to static conditions calculated at half of the screw length. In conditions of vibrations or in presence of dynamic loads these values should be reduced. We cannot accept responsibility for mounts that have been tampered or modified.**