




PH-3 Hanger


PH-3 Hanger-Elements are fitted with a spring element and a rubber 'acoustic stopper'. These 'low frequency' hanger elements are very suitable for suspension of rotating equipment and piping work. The static deflection ranges from 2 to 20 mm. and features protection against complete loss of support in the event of mechanical or fire damage.

Load Capacity: 2 to 90 lbs.


Applications: hanger-elements for piping, acoustic ceilings, fans, air-conditioning units, sensitive equipment, etc.

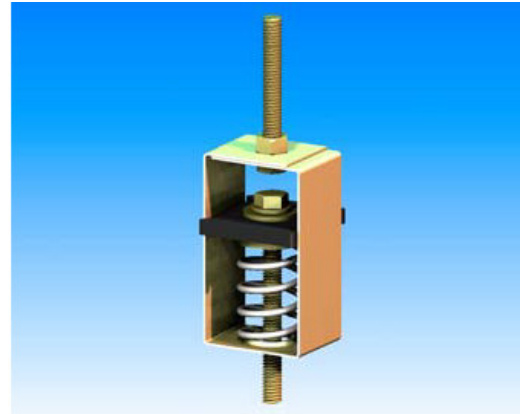

SIDE-VIEW

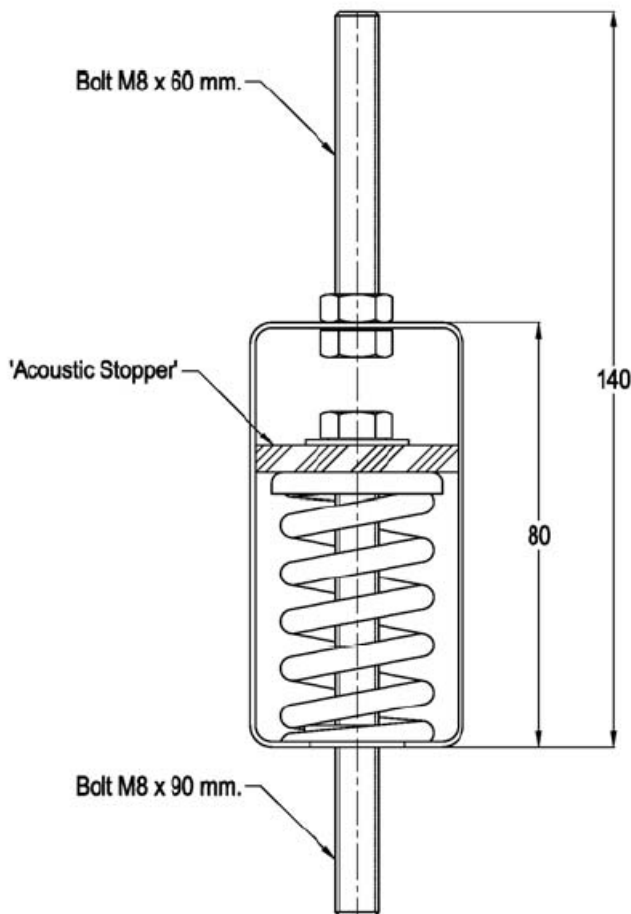

TOP-VIEW



LOAD CHARACTERISTICS

