


## Application


elasto-Flex Elements are used for the protection of light to medium weight equipment against active or passive vibrations and structure-borne noise. Vertically pliant, this element has a sufficient horizontal stiffness that restricts any lateral movement of the object mounted

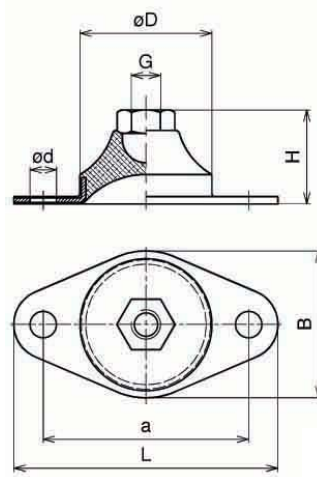

Part No.	Length		Height		Wide		hole sep.		Diameter		Thread (G)	Hole		Tech Info	Elastomer	ShoreA
	mm (L)	in (L)	mm (H)	in (H)	mm (B)	in (B)	mm (a)	in (a)	mm (D)	in (D)		mm (d)	in (d)			
H6020W	60	2,36	20	0,79	35	1,38	45	1,77	30	1,18	M6	6	0,24	<a href="#">Tech Info</a>	NR	43
H6020	60	2,36	20	0,79	35	1,38	45	1,77	30	1,18	M6	6	0,24	<a href="#">Tech Info</a>	NR	57
H6020H	60	2,36	20	0,79	35	1,38	45	1,77	30	1,18	M6	6	0,24	<a href="#">Tech Info</a>	NR	68
H6020UW	60	2,36	20	0,79	35	1,38	45	1,77	30	1,18	UNC1/4-20	6	0,24	<a href="#">Tech Info</a>	NR	43
H6020U	60	2,36	20	0,79	35	1,38	45	1,77	30	1,18	UNC1/4-20	6	0,24	<a href="#">Tech Info</a>	NR	57
H6020UH	60	2,36	20	0,79	35	1,38	45	1,77	30	1,18	UNC1/4-20	6	0,24	<a href="#">Tech Info</a>	NR	68
H9032W	90	3,54	32	1,26	50	1,97	70	2,76	45	1,77	M10	9	0,35	<a href="#">Tech Info</a>	NR	43
H9032	90	3,54	32	1,26	50	1,97	70	2,76	45	1,77	M10	9	0,35	<a href="#">Tech Info</a>	NR	57
H9032H	90	3,54	32	1,26	50	1,97	70	2,76	45	1,77	M10	9	0,35	<a href="#">Tech Info</a>	NR	68
H9032UW	90	3,54	32	1,26	50	1,97	70	2,76	45	1,77	UNC5/16-18	9	0,35	<a href="#">Tech Info</a>	NR	43
H9032U	90	3,54	32	1,26	50	1,97	70	2,76	45	1,77	UNC5/16-18	9	0,35	<a href="#">Tech Info</a>	NR	57
H9032UH	90	3,54	32	1,26	50	1,97	70	2,76	45	1,77	UNC5/16-18	9	0,35	<a href="#">Tech Info</a>	NR	68
H14050W	140	5,51	50	1,97	80	3,15	105	4,13	70	2,76	M16	13	0,51	<a href="#">Tech Info</a>	NR	43
H14050	140	5,51	50	1,97	80	3,15	105	4,13	70	2,76	M16	13	0,51	<a href="#">Tech Info</a>	NR	57
H14050H	140	5,51	50	1,97	80	3,15	105	4,13	70	2,76	M16	13	0,51	<a href="#">Tech Info</a>	NR	68
H14050UW	140	5,51	50	1,97	80	3,15	105	4,13	70	2,76	UNC5/8-10	13	0,51	<a href="#">Tech Info</a>	NR	43
H14050U	140	5,51	50	1,97	80	3,15	105	4,13	70	2,76	UNC5/8-10	13	0,51	<a href="#">Tech Info</a>	NR	57
H14050UH	140	5,51	50	1,97	80	3,15	105	4,13	70	2,76	UNC5/8-10	13	0,51	<a href="#">Tech Info</a>	NR	68

## Application


elasto-Flex Elements are used for the protection of lightweight to medium weight equipment against active or passive vibrations and structure-borne noise. Vertically pliant, this element has a sufficient horizontal stiffness that restricts any lateral movement of the object be mounted.

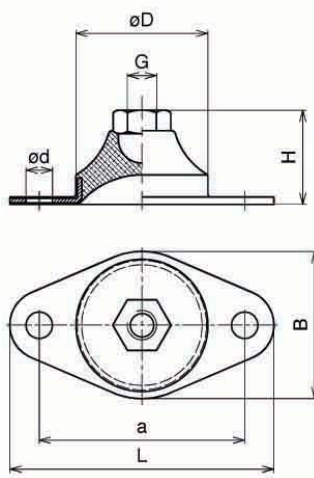

elasto-Flex-Elements Type 60



elasto-Flex-Elements Type 90

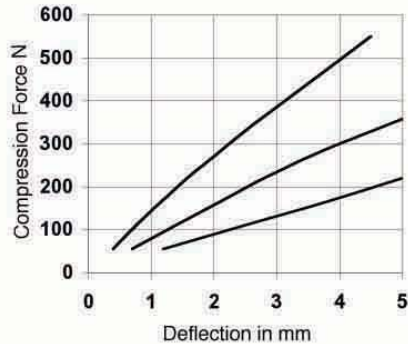

elasto-Flex-Elements Type 140

