


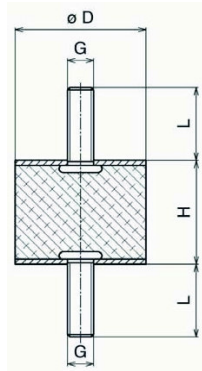


A-UNF-Mounts





Part Number	Dia. x Height mm (Inch) (D) x (H)	Thread (G)	Length mm (Inch) (L)	Thickness mm (Inch) (S)	Quality NR ShoreA Duro	Compression				Shear			
						Max. Static Load		Spring Rate Ks		Max. Static Load		Spring Rate Ks	
						N	lbs	N/mm	lbs/in	N	lbs	N/mm	lbs/in
9764GF	8 x 8 (.31) x (.31)	UNC4-40	6 (.24)	1 (.04)	43	23	5	53	300	8	2	10	57
9764AF					57	43	10	98	554	15	3	19	105
9764KU					68	69	16	159	899	24	5	30	170
9797GF	8 x 8 (.31) x (.31)	UNC6-32	6 (.24)	1 (.04)	43	18	4	23	130	6	1	5	28
9797AF					57	33	7	43	240	11	2	9	52
9797KU					68	54	12	69	390	18	4	15	85
9712GF	9.7 x 6.4 (.38) x (.25)	UNC8-32	10 (.39)	1 (.04)	43	16	4	15	85	5	1	4	23
9712AF					57	30	7	28	157	9	2	7	42
9712KF					68	48	11	45	254	15	3	12	68
1608G6F13	15.8 x 8 (.62) x (.31)	UNF1/4-28	12.7 (.5)	1.5 (.06)	43	103	23	258	1458	34	8	29	164
1608A6F13					57	191	43	477	2697	63	14	54	303
1608K6F13					68	309	69	774	4374	102	23	87	492
1613G6F13	15.8 x 12.7 (.62) x (.5)	UNF1/4-28	12.7 (.5)	1.5 (.06)	43	54	12	56	316	18	4	12	68
1613A6F13					57	100	22	104	585	33	7	22	125
1613K6F13					68	162	36	168	949	54	12	36	203
1616G6F13	15.8 x 15.8 (.62) x (.62)	UNF1/4-28	12.7 (.5)	1.5 (.06)	43	49	11	38	215	16	4	9	51
1616A6F13					57	91	20	70	397	30	7	17	94
1616K6F13					68	147	33	114	644	48	11	27	153
2015GF16	20 x 15 (.79) x (.59)	UNF10-32	10 (.39)	2 (.08)	43	89	20	81	458	30	7	16	90
2015AF16					57	165	37	150	847	56	12	30	167
2015KF16					68	267	60	243	1373	90	20	48	271
2020GF10	20 x 20 (.79) x (.79)	UNF10-32	10 (.39)	2 (.08)	43	76	17	47	266	25	6	11	62
2020AF10					57	141	32	87	491	46	10	20	115
2020KF10					68	228	51	141	797	75	17	33	186
2025GF10	20 x 25 (.79) x (.98)	UNF10-32	10 (.39)	2 (.08)	43	70	16	33	186	23	5	9	51
2025AF10					57	130	29	61	345	43	10	17	94
2025KF10					68	210	47	99	559	69	16	27	153
2030GF10	20 x 30 (.79) x (1.18)	UNF10-32	10 (.39)	2 (.08)	43	66	15	25	141	22	5	7	40
2030AF10					57	122	27	46	261	41	9	13	73
2030KF10					68	198	45	75	424	66	15	21	119
2510GF10	25.4 x 10 (1) x (.39)	UNF10-32	10 (.39)	2 (.08)	43	263	59	438	2475	88	47	65	367
2510AF10					57	487	109	810	4579	163	37	120	680
2510KF10					68	789	177	1314	7426	264	59	195	1102

A-UNF-Mounts

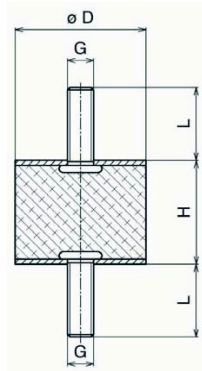



Part Number	Dia. x Height mm (Inch) (D) x (H)	Thread (G)	Length mm (Inch) (L)	Thickness mm (Inch) (S)	Quality NR ShoreA Duro	Compression				Shear			
						Max. Static Load		Spring Rate Ks		Max. Static Load		Spring Rate Ks	
						N	lbs	N/mm	lbs/in	N	lbs	N/mm	lbs/in
2513GF10	25.4 x 12.7 (1) x (.5)	UNF10-32	10 (.39)	2 (.08)	43	183	41	203	1147	61	31	38	215
57					339	76	376	2122	113	25	70	397	
68					549	123	609	3442	183	41	114	644	
2515GF10	25.4 x 15.7 (1) x (.62)	UNF10-32	10 (.39)	2 (.08)	43	159	36	145	819	53	12	25	141
57					294	66	268	1516	98	22	46	261	
68					477	107	435	2458	159	36	75	424	
2519GF10	25.4 x 19.1 (1) x (.75)	UNF10-32	10 (.39)	2 (.08)	43	134	30	89	503	45	10	19	107
57					248	56	165	930	83	19	35	199	
68					402	90	267	1509	135	30	57	322	
2525GF10	25.4 x 25.4 (1) x (1)	UNF10-32	10 (.39)	2 (.08)	43	117	26	55	311	39	9	13	73
57					216	49	102	575	72	16	24	136	
68					351	79	165	932	117	26	39	220	
5015GF28	50 x 15 (1.97) x (.59)	UNF3/8-24	25 (.98)	2 (.08)	43	1452	326	1613	9115	484	109	125	706
57					2686	604	2984	16864	895	201	231	1307	
68					4356	979	4839	27346	1452	326	375	2119	
5020GF28	50 x 20 (1.97) x (.79)	UNC3/8-16	25 (.98)	2 (.08)	43	905	203	646	3651	302	68	80	452
57					1674	376	1195	6754	559	126	148	836	
68					2715	610	1938	10952	906	204	240	1356	
5025GF28	50 x 25 (1.97) x (.98)	UNF3/8-24	25 (.98)	2 (.08)	43	703	158	370	2091	234	53	59	333
57					1301	292	685	3868	433	97	109	617	
68					2109	474	1110	6273	702	158	177	1000	
5030GF28	50 x 30 (1.97) x (1.18)	UNF3/8-24	25 (.98)	2 (.08)	43	603	136	251	1418	201	47	47	266
57					1116	251	464	2624	372	84	87	491	
68					1809	407	753	4255	603	136	141	797	
5035GF28	50 x 35 (1.97) x (1.38)	UNF3/8-24	25 (.98)	2 (.08)	43	544	122	187	1057	181	31	39	220
57					1006	226	346	1955	335	75	72	408	
68					1632	367	561	3170	543	122	117	661	
5040GF28	50 x 40 (1.97) x (1.57)	UNF3/8-24	25 (.98)	2 (.08)	43	505	114	149	842	168	38	33	186
57					934	210	276	1558	311	70	61	345	
68					1515	341	447	2526	504	113	99	559	
5045GF28	50 x 45 (1.97) x (1.77)	UNF3/8-24	25 (.98)	2 (.08)	43	479	108	123	695	160	36	29	164
57					886	199	228	1286	296	67	54	303	
68					1437	323	369	2085	480	108	87	492	

A-UNF-Mounts

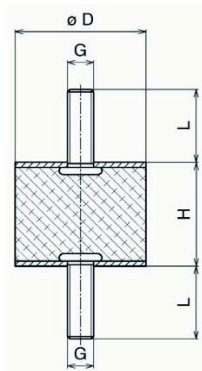

Part Number	Dia. x Height mm (Inch) (D) x (H)	Thread (G)	Length mm (Inch) (L)	Thickness mm (Inch) (S)	Quality NR ShoreA Duro	Compression				Shear			
						Max. Static Load		Spring Rate Ks		Max. Static Load		Spring Rate Ks	
						N	lbs	N/mm	lbs/in	N	lbs	N/mm	lbs/in
5050GF28	50 x 50 (1.97) x (1.97)	UNF3/8-24	28 (1.10)	2 (.08)	43	459	103	104	588	153	34	25	141
5050AF28					57	849	191	192	1087	283	64	46	261
5050KF28					68	1377	310	312	1763	459	103	75	424
5075GF28	50 x 75 (1.97) x (2.95)	UNF3/8-24	28 (1.10)	3 (.12)	43	408	92	59	333	136	31	16	90
5075AF28					57	755	170	109	617	252	57	30	167
5075KF28					68	1224	275	177	1000	408	92	48	271
5015G13F25	50 x 15 (1.97) x (.59)	UNC1/2-20	25 (.98)	3 (.12)	43	307	69	99	559	102	23	23	130
5015A13F25					57	568	128	183	1035	189	42	43	240
5015K13F25					68	921	207	297	1678	306	69	69	390
5020G13F25	50 x 20 (1.97) x (.79)	UNC1/2-20	25 (.98)	3 (.12)	43	292	66	81	458	97	22	20	113
5020A13F25					57	540	121	150	847	179	40	37	209
5020K13F25					68	876	197	243	1373	291	65	60	339
5025G13F25	50 x 25 (1.97) x (.98)	UNC1/2-20	25 (.98)	3 (.12)	43	703	158	370	2091	234	53	59	333
5025A13F25					57	1301	292	685	3868	433	97	109	617
5025K13F25					68	2109	474	1110	6273	702	158	177	1000
5030G13F25	50 x 30 (1.97) x (1.18)	UNC1/2-20	25 (.98)	3 (.12)	43	603	136	251	1418	201	47	47	266
5030A13F25					57	1116	251	464	2624	372	84	87	491
5030K13F25					68	1809	407	753	4255	603	136	141	797
5035G13F25	50 x 35 (1.97) x (1.38)	UNC1/2-20	25 (.98)	3 (.12)	43	544	122	187	1057	181	31	39	220
5035A13F25					57	1006	226	346	1955	335	75	72	408
5035K13F25					68	1632	367	561	3170	543	122	117	661
5040G13F25	50 x 40 (1.97) x (1.57)	UNC1/2-20	25 (.98)	3 (.12)	43	505	114	149	842	168	38	33	186
5040A13F25					57	934	210	276	1558	311	70	61	345
5040K13F25					68	1515	341	447	2526	504	113	99	559
5045G13F25	50 x 45 (1.97) x (1.77)	UNC1/2-20	25 (.98)	3 (.12)	43	479	108	123	695	160	36	29	164
5045A13F25					57	886	199	228	1286	296	67	54	303
5045K13F25					68	1437	323	369	2085	480	108	87	492
5050G13F25	50 x 50 (1.97) x (1.97)	UNC1/2-20	25 (.98)	3 (.12)	43	459	103	104	588	153	34	25	141
5050A13F25					57	849	191	192	1087	283	64	46	261
5050K13F25					68	1377	310	312	1763	459	103	75	424
5075G13F25	50 x 75 (1.97) x (2.95)	UNC1/2-20	25 (.98)	3 (.12)	43	408	92	59	333	136	31	16	90
5075A13F25					57	755	170	109	617	252	57	30	167
5075K13F25					68	1224	275	177	1000	408	92	48	271

A-UNF-Mounts

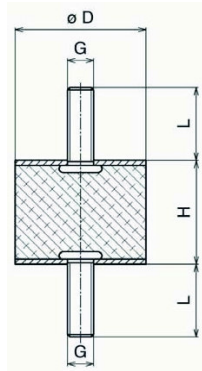

Part Number	Dia. x Height mm (Inch) (D) x (H)	Thread (G)	Length mm (Inch) (L)	Thickness mm (Inch) (S)	Quality NR ShoreA Duro	Compression				Shear			
						Max. Static Load		Spring Rate Ks		Max. Static Load		Spring Rate Ks	
						N	lbs	N/mm	lbs/in	N	lbs	N/mm	lbs/in
7525GF38	75 x 25 (2.95) x (.98)	UNC1/2-20	38 (1.50)	3 (.12)	43	2240	504	1179	6663	747	168	133	752
57					4144	932	2181	12326	1382	311	246	1390	
68					6720	1511	3537	19988	2241	504	399	2255	
7530GF38	75 x 30 (2.95) x (1.18)	UNC1/2-20	38 (1.50)	3 (.12)	43	1809	407	754	4261	603	136	105	593
57					3347	752	1395	7883	1116	251	194	1098	
68					5427	1220	2262	12783	1809	407	315	1780	
7540GF38	75 x 40 (2.95) x (1.57)	UNC1/2-20	38 (1.50)	3 (.12)	43	1404	316	413	2334	468	105	74	418
57					2597	584	764	4318	866	195	137	774	
68					4212	947	1239	7002	1404	316	222	1255	
7550GF38	75 x 50 (2.95) x (1.97)	UNC1/2-20	38 (1.50)	3 (.12)	43	1216	273	276	1560	405	47	47	266
57					2250	506	511	2886	749	168	87	491	
68					3648	820	828	4679	1215	273	141	797	
7555GF38	75 x 55 (2.95) x (2.17)	UNC1/2-20	38 (1.50)	3 (.12)	43	1157	260	236	1334	386	31	39	220
57					2140	481	437	2467	714	161	72	408	
68					3471	780	708	4001	1158	260	117	661	
7560GF38	75 x 60 (2.95) x (2.36)	UNC1/2-20	38 (1.50)	3 (.12)	43	1110	250	206	1164	370	83	47	266
57					2054	462	381	2154	685	154	87	491	
68					3330	749	618	3492	1110	250	141	797	
7575GF38	75 x 75 (2.95) x (2.95)	UNC1/2-20	38 (1.50)	3 (.12)	43	1018	229	148	836	339	76	25	141
57					1883	423	274	1547	627	141	46	261	
68					3054	687	444	2509	1017	229	75	424	
75100GF38	75 x 100 (2.95) x (3.94)	UNC1/2-20	38 (1.50)	3 (.12)	43	938	211	100	565	313	70	16	90
57					1735	390	185	1045	579	130	30	167	
68					2814	633	300	1695	939	211	48	271	
8050GF	80 x 50 (3.15) x (1.97)	UNC1/2-20	38 (1.50)	3 (.12)	43	1430	321	325	1837	477	107	65	367
57					2646	595	601	3398	882	198	120	680	
68					4290	964	975	5510	1431	322	195	1102	
8057GF	80 x 57 (3.15) x (2.24)	UNC1/2-20	38 (1.50)	3 (.12)	43	1331	299	261	1475	444	100	56	316
57					2462	554	483	2729	821	185	104	585	
68					3993	898	783	4425	1332	299	168	949	
8075GF	80 x 75 (3.15) x (2.95)	UNC1/2-20	38 (1.50)	3 (.12)	43	1183	266	171	966	394	89	42	237
57					2189	492	316	1788	729	164	78	439	
68					3549	798	513	2899	1182	266	126	712	