


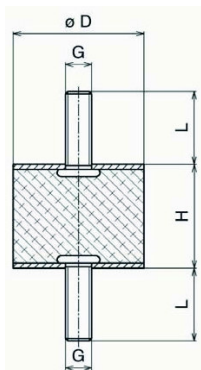


# A-Mounts





Part Number	Dia. x Height mm (Inch) (D) x (H)	Thread (G)	Length mm (Inch) (L)	Thickness mm (Inch) (S)	Quality NR  ShoreA Duro	Compression				Shear			
						Max. Static Load		Spring Rate Ks		Max. Static Load		Spring Rate Ks	
						N	lbs	N/mm	lbs/in	N	lbs	N/mm	lbs/in
0808G	8 x 8 (.31) x (.31)	M3	6 (.24)	1 (.04)	43	12	3	21	119	4	1	5	28
0808A					57	22	5	39	220	7	2	9	52
0808K					68	36	8	63	356	12	3	15	85
1006G	10 x 6.4 (.39) x (.25)	M4	10 (.39)	1 (.04)	43	23	5	53	300	8	31	10	57
1006A					57	43	10	98	554	15	3	19	105
1006K					68	69	16	159	899	24	5	30	170
1010G	10 x 10 (.39) x (.39)	M4	10 (.39)	1 (.04)	43	19	4	25	141	6	1	6	34
1010A					57	35	8	46	261	11	2	11	63
1010K					68	57	13	75	424	18	4	18	102
1013G	10 x 13 (.39) x (.51)	M4	10 (.39)	1 (.04)	43	18	4	17	96	6	1	4	23
1013A					57	33	7	31	178	11	2	7	42
1013K					68	54	12	51	288	18	4	12	68
1508G	15 x 8 (.59) x (.31)	M4	13 (.51)	1.5 (.06)	43	85	19	213	1204	28	6	25	141
1508A					57	157	35	394	2227	52	12	46	261
1508K					68	255	57	639	3611	84	19	75	424
1513G	15 x 13 (.59) x (.51)	M4	13 (.51)	1.5 (.06)	43	48	11	53	300	16	4	11	62
1513A					57	89	20	98	554	30	7	20	115
1513K					68	144	32	159	899	48	11	33	186
1515G	15 x 15 (.59) x (.59)	M4	13 (.51)	1.5 (.06)	43	44	10	40	226	15	3	9	51
1515A					57	81	18	74	418	28	6	17	94
1515K					68	132	30	120	678	45	10	27	153
2015G	20 x 15 (.79) x (.59)	M6	15 (.59)	2 (.08)	43	89	20	81	458	30	7	16	90
2015A					57	165	37	150	847	56	12	30	167
2015K					68	267	60	243	1373	90	20	48	271
2020G	20 x 20 (.79) x (.79)	M6	15 (.59)	2 (.08)	43	76	17	47	266	25	6	11	62
2020A					57	141	32	87	491	46	10	20	115
2020K					68	228	51	141	797	75	17	33	186
2025G	20 x 25 (.79) x (.98)	M6	15 (.59)	2 (.08)	43	70	16	33	186	23	5	9	51
2025A					57	130	29	61	345	43	10	17	94
2025K					68	210	47	99	559	69	16	27	153
2030G	20 x 30 (.79) x (1.18)	M6	15 (.59)	2 (.08)	43	66	15	25	141	22	5	7	40
2030A					57	122	27	46	261	41	9	13	73
2030K					68	198	45	75	424	66	15	21	119

# A-Mounts

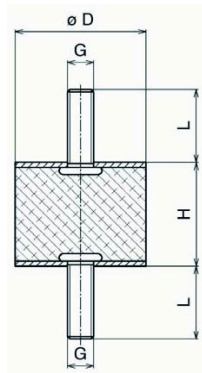



Part Number	Dia. x Height mm (Inch) (D) x (H)	Thread (G)	Length mm (Inch) (L)	Thickness mm (Inch) (S)	Quality NR  ShoreA Duro	Compression				Shear			
						Max. Static Load		Spring Rate Ks		Max. Static Load		Spring Rate Ks	
						N	lbs	N/mm	lbs/in	N	lbs	N/mm	lbs/in
2510G	25 x 10 (.98) x (.39)	M6	18 (.71)	2 (.08)	43	263	59	438	2475	88	47	65	367
2510A					487	109	810	4579	163	37	120	680	
2510K					789	177	1314	7426	264	59	195	1102	
2513G	25 x 13 (.98) x (.51)	M6	18 (.71)	2 (.08)	43	183	41	203	1147	61	31	38	215
2515A					339	76	376	2122	113	25	70	397	
2513K					549	123	609	3442	183	41	114	644	
2515G	25 x 15 (.98) x (.59)	M6	18 (.71)	2 (.08)	43	159	36	145	819	53	12	25	141
2515A					294	66	268	1516	98	22	46	261	
2515K					477	107	435	2458	159	36	75	424	
2519G	25 x 19 (.98) x (.75)	M6	18 (.71)	2 (.08)	43	134	30	89	503	45	10	19	107
2519A					248	56	165	930	83	19	35	199	
2519K					402	90	267	1509	135	30	57	322	
2525G	25 x 25 (.98) x (.98)	M6	18 (.71)	2 (.08)	43	117	26	55	311	39	9	13	73
2525A					216	49	102	575	72	16	24	136	
2525K					351	79	165	932	117	26	39	220	
2530G	25 x 30 (.98) x (1.18)	M6	18 (.71)	2 (.08)	43	109	25	42	237	36	8	11	62
2530A					202	45	78	439	67	15	20	115	
2530K					327	74	126	712	108	24	33	186	
2535G	25 x 35 (.98) x (1.38)	M6	18 (.71)	2 (.08)	43	104	23	34	192	35	8	9	51
2535A					192	43	63	355	65	15	17	94	
2535K					312	70	102	576	105	24	27	153	
3015G	30 x 15 (1.18) x (.59)	M8	20 (.79)	2 (.08)	43	260	58	236	1334	87	20	37	209
3015A					481	108	437	2467	161	36	68	387	
3015K					780	175	708	4001	261	59	111	627	
3020G	30 x 20 (1.18) x (.79)	M8	20 (.79)	2 (.08)	43	204	46	128	723	68	15	25	141
3020A					377	85	237	1338	126	28	46	261	
3020K					612	138	384	2170	204	46	75	424	
3025G	30 x 25 (1.18) x (.98)	M8	20 (.79)	2 (.08)	43	180	40	86	486	60	13	19	107
3025A					333	75	159	899	111	25	35	199	
3025K					540	121	258	1458	180	40	57	322	
3028G	30 x 28 (1.18) x (1.10)	M8	20 (.79)	2 (.08)	43	171	38	71	401	57	13	17	96
3028A					316	71	131	742	105	24	31	178	
3028K					513	115	213	1204	171	38	51	288	

# A-Mounts

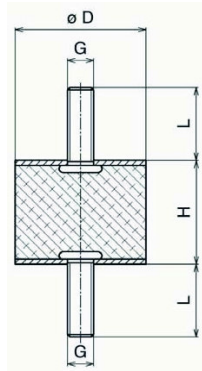



Part Number	Dia. x Height mm (Inch) (D) x (H)	Thread (G)	Length mm (Inch) (L)	Thickness mm (Inch) (S)	Quality NR  ShoreA Duro	Compression				Shear			
						Max. Static Load		Spring Rate Ks		Max. Static Load		Spring Rate Ks	
						N	lbs	N/mm	lbs/in	N	lbs	N/mm	lbs/in
3030G	30 x 30 (1.18) x (1.18)	M8	20 (.79)	2 (.08)	43	166	37	64	362	55	47	16	90
3030A					57	307	69	118	669	102	23	30	167
3030K					68	498	112	192	1085	165	37	48	271
3040G	30 x 40 (1.18) x (1.57)	M8	20 (.79)	2 (.08)	43	152	34	42	237	51	31	11	62
3040A					57	281	63	78	439	94	21	20	115
3040K					68	456	103	126	712	153	34	33	186
4015G	40 x 15 (1.57) x (.59)	M8	23 (.91)	2 (.08)	43	589	132	535	3023	196	44	66	373
4015A					57	1090	245	990	5593	363	82	122	690
4015K					68	1767	397	1605	9070	588	132	198	1119
4020G	40 x 20 (1.57) x (.79)	M8	23 (.91)	2 (.08)	43	434	98	271	1531	145	33	45	254
4020A					57	803	180	501	2833	268	60	83	470
4020K					68	1302	293	813	4594	435	98	135	763
4025G	40 x 25 (1.57) x (.98)	M8	23 (.91)	2 (.08)	43	366	82	175	989	122	27	34	192
4025A					57	677	152	324	1830	226	51	63	355
4025K					68	1098	247	525	2967	366	82	102	576
4030G	40 x 30 (1.57) x (1.18)	M8	23 (.91)	2 (.08)	43	330	74	127	718	110	25	28	158
4030A					57	611	137	235	1328	204	46	52	293
4030K					68	990	223	381	2153	330	74	84	475
4035G	40 x 35 (1.57) x (1.38)	M8	23 (.91)	2 (.08)	43	307	69	99	559	102	23	23	130
4035A					57	568	128	183	1035	189	42	43	240
4035K					68	921	207	297	1678	306	69	69	390
4040G	40 x 40 (1.57) x (1.57)	M8	23 (.91)	2 (.08)	43	292	66	81	458	97	22	20	113
4040A					57	540	121	150	847	179	40	37	209
4040K					68	876	197	243	1373	291	65	60	339
5015G	50 x 15 (1.97) x (.59)	M10	28 (1.10)	2 (.08)	43	1452	326	1613	9115	484	109	125	706
5015A					57	2686	604	2984	16864	895	201	231	1307
5015K					68	4356	979	4839	27346	1452	326	375	2119
5020G	50 x 20 (1.97) x (.79)	M10	28 (1.10)	2 (.08)	43	905	203	646	3651	302	68	80	452
5020A					57	1674	376	1195	6754	559	126	148	836
5020K					68	2715	610	1938	10952	906	204	240	1356
5025G	50 x 25 (1.97) x (.98)	M10	28 (1.10)	2 (.08)	43	703	158	370	2091	234	53	59	333
5025A					57	1301	292	685	3868	433	97	109	617
5025K					68	2109	474	1110	6273	702	158	177	1000

# A-Mounts

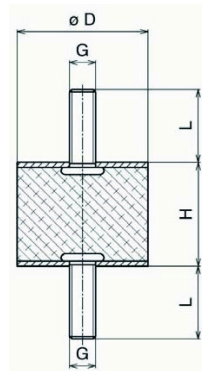



Part Number	Dia. x Height mm (Inch) (D) x (H)	Thread (G)	Length mm (Inch) (L)	Thickness mm (Inch) (S)	Quality NR  ShoreA Duro	Compression				Shear			
						Max. Static Load		Spring Rate Ks		Max. Static Load		Spring Rate Ks	
						N	lbs	N/mm	lbs/in	N	lbs	N/mm	lbs/in
5030G	50 x 30 (1.97) x (1.18)	M10	28 (1.10)	2 (.08)	43	603	136	251	1418	201	47	47	266
5030A					57	1116	251	464	2624	372	84	87	491
5030K					68	1809	407	753	4255	603	136	141	797
5035G	50 x 35 (1.97) x (1.38)	M10	28 (1.10)	2 (.08)	43	544	122	187	1057	181	31	39	220
5035A					57	1006	226	346	1955	335	75	72	408
5035K					68	1632	367	561	3170	543	122	117	661
5040G	50 x 40 (1.97) x (1.57)	M10	28 (1.10)	2 (.08)	43	505	114	149	842	168	38	33	186
5040A					57	934	210	276	1558	311	70	61	345
5040K					68	1515	341	447	2526	504	113	99	559
5045G	50 x 45 (1.97) x (1.77)	M10	28 (1.10)	2 (.08)	43	479	108	123	695	160	36	29	164
5045A					57	886	199	228	1286	296	67	54	303
5045K					68	1437	323	369	2085	480	108	87	492
5050G	50 x 50 (1.97) x (1.97)	M10	28 (1.10)	2 (.08)	43	459	103	104	588	153	34	25	141
5050A					57	849	191	192	1087	283	64	46	261
5050K					68	1377	310	312	1763	459	103	75	424
5075G	50 x 57 (1.97) x (2.24)	M10	28 (1.10)	2 (.08)	43	408	92	59	333	136	31	16	90
5075A					57	755	170	109	617	252	57	30	167
5075K					68	1224	275	177	1000	408	92	48	271
7525G	75 x 25 (2.95) x (.98)	M12	37 (1.46)	3 (.12)	43	2240	504	1179	6663	747	168	133	752
7525A					57	4144	932	2181	12326	1382	311	246	1390
7525K					68	6720	1511	3537	19988	2241	504	399	2255
7530G	75 x 30 (2.95) x (1.18)	M12	37 (1.46)	3 (.12)	43	1809	407	754	4261	603	136	105	593
7530A					57	3347	752	1395	7883	1116	251	194	1098
7530K					68	5427	1220	2262	12783	1809	407	315	1780
7535G	75 x 35 (2.95) x (1.38)	M12	37 (1.46)	3 (.12)	43	1562	351	539	3046	521	117	87	492
7535A					57	2890	650	997	5635	964	217	161	910
7535K					68	4686	1053	1617	9138	1563	351	261	1475
7540G	75 x 40 (2.95) x (1.57)	M12	37 (1.46)	3 (.12)	43	1404	316	413	2334	468	105	74	418
7540A					57	2597	584	764	4318	866	195	137	774
7540K					68	4212	947	1239	7002	1404	316	222	1255
7545G	75 x 45 (2.95) x (1.77)	M12	37 (1.46)	3 (.12)	43	1295	291	332	1876	432	97	65	367
7540A					57	2396	539	614	3471	799	180	120	680
7545K					68	3885	873	996	5629	1296	291	195	1102

# A-Mounts

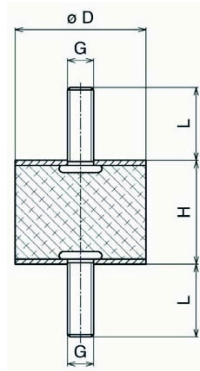

Part Number	Dia. x Height mm (Inch) (D) x (H)	Thread (G)	Length mm (Inch) (L)	Thickness mm (Inch) (S)	Quality NR  ShoreA Duro	Compression				Shear			
						Max. Static Load		Spring Rate Ks		Max. Static Load		Spring Rate Ks	
						N	lbs	N/mm	lbs/in	N	lbs	N/mm	lbs/in
7550G	75 x 50 (2.95) x (1.97)	M12	37 (1.46)	3 (.12)	43	1216	273	276	1560	405	47	57	322
7550A					2250	506	511	2886	749	168	105	596	
7550K					3648	820	828	4679	1215	273	171	966	
7555G	75 x 55 (2.95) x (2.17)	M12	37 (1.46)	3 (.12)	43	1157	260	236	1334	386	31	51	288
7555A					2140	481	437	2467	714	161	94	533	
7555K					3471	780	708	4001	1158	260	153	865	
7560G	75 x 60 (2.95) x (2.36)	M12	37 (1.46)	3 (.12)	43	1110	250	206	1164	370	83	47	266
7560A					2054	462	381	2154	685	154	87	491	
7560K					3330	749	618	3492	1110	250	141	797	
7570G	75 x 70 (2.95) x (2.76)	M12	37 (1.46)	3 (.12)	43	1043	234	163	921	348	78	39	220
7570A					1930	434	302	1704	644	145	72	408	
7570K					3129	703	489	2763	1044	235	117	661	
7575G	75 x 75 (2.95) x (2.95)	M12	37 (1.46)	3 (.12)	43	1018	229	148	836	339	76	37	209
7575A					1883	423	274	1547	627	141	68	387	
7575K					3054	687	444	2509	1017	229	111	627	
75100G	75 x 100 (2.95) x (3.94)	M12	37 (1.46)	4 (.16)	43	938	211	100	565	313	70	27	153
75100A					1735	390	185	1045	579	130	50	282	
75100K					2814	633	300	1695	939	211	81	458	
1030G	100 x 30 (3.94) x (1.18)	M16	45 (1.77)	4 (.16)	43	4610	1036	2096	11845	1537	346	204	1153
1030A					8529	1917	3878	21913	2843	639	377	2133	
1030K					13830	3109	6288	35535	4611	1037	612	3459	
1035G	100 x 35 (3.94) x (1.38)	M16	45 (1.77)	4 (.16)	43	3743	841	1386	7833	1248	281	166	938
1035A					6925	1557	2564	14490	2309	519	307	1735	
1035K					11229	2524	4158	23498	3744	842	498	2814	
1040G	100 x 40 (3.94) x (1.57)	M16	45 (1.77)	4 (.16)	43	3217	723	1005	5679	1072	241	140	791
1040A					5951	1338	1859	10507	1983	446	259	1464	
1040K					9651	2170	3015	17038	3216	723	420	2374	
1045G	100 x 45 (3.94) x (1.77)	M16	45 (1.77)	4 (.16)	43	2868	645	775	4380	956	215	121	684
1045A					5306	1193	1434	8102	1769	398	224	1265	
1045K					8604	1934	2325	13139	2868	645	363	2051	
1050G	100 x 50 (3.94) x (1.97)	M16	45 (1.77)	4 (.16)	43	2622	589	624	3526	874	196	107	605
1050A					4851	1090	1154	6524	1617	363	198	1119	
1050K					7866	1768	1872	10579	2622	589	321	1814	



# A-Mounts

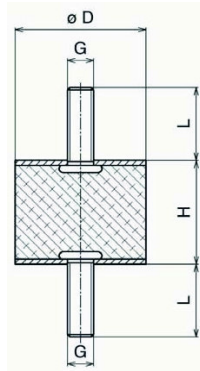

Part Number	Dia. x Height mm (Inch) (D) x (H)	Thread (G)	Length mm (Inch) (L)	Thickness mm (Inch) (S)	Quality NR  ShoreA Duro	Compression				Shear			
						Max. Static Load		Spring Rate Ks		Max. Static Load		Spring Rate Ks	
						N	lbs	N/mm	lbs/in	N	lbs	N/mm	lbs/in
1055G	100 x 55 (3.94 x (2.17))	M16	45 (1.77)	3 (.12)	43	2441	549	519	2933	814	183	95	537
1055A					4516	1015	960	5426	1506	339	176	993	
1055K					7323	1646	1557	8799	2442	549	285	1611	
1060G	100 x 60 (3.94 x (2.36))	M16	45 (1.77)	3 (.12)	43	2302	518	443	2503	767	172	86	486
1060A					4259	957	820	4631	1419	319	159	899	
1060K					6906	1553	1329	7510	2301	517	258	1458	
1065G	100 x 65 (3.94 x (2.56))	M16	45 (1.77)	3 (.12)	43	2194	493	385	2176	731	164	79	446
1065A					4059	912	712	4025	1352	304	146	826	
1065K					6582	1480	1155	6527	2193	493	237	1339	
1070G	100 x 70 (3.94 x (2.76))	M16	45 (1.77)	3 (.12)	43	2106	473	340	1921	702	158	72	407
1070A					3896	876	629	3555	1299	292	133	753	
1070K					6318	1420	1020	5764	2106	473	216	1221	
1075G	100 x 75 (3.94 x (2.95))	M16	45 (1.77)	3 (.12)	43	2034	457	304	1718	678	152	67	379
1075A					3763	846	562	3178	1254	282	124	700	
1075K					6102	1372	912	5154	2034	457	201	1136	
1080G	100 x 80 (3.94 x (3.15))	M16	45 (1.77)	3 (.12)	43	1974	444	274	1548	658	148	62	350
1080A					3652	821	507	2865	1217	274	115	648	
1080K					5922	1331	822	4645	1974	444	186	1051	
10100G	100 x 100 (3.94 x (3.94))	M16	45 (1.77)	4 (.16)	43	1810	407	197	1113	603	136	49	277
10100A					3349	753	364	2060	1116	251	91	512	
10100K					5430	1221	591	3340	1809	407	147	831	
10140G	100 x 140 (3.94 x (5.51))	M16	45 (1.77)	4 (.16)	43	1648	370	125	706	549	123	34	192
10140A					3049	685	231	1307	1016	228	63	355	
10140K					4944	1111	375	2119	1647	370	102	576	
1250G	120 x 50 (4.72 x (1.97))	M16	45 (1.77)	4 (.16)	43	4479	1007	1120	6329	1493	161	238	1345
1250A					8286	1863	2072	11709	2762	621	440	2488	
1250K					13437	3021	3360	18988	4479	1007	714	4035	
1260G	125 x 60 (4.92 x (2.36))	M16	45 (1.77)	4 (.16)	43	4236	952	847	4787	1412	317	140	791
1260A					7837	1762	1567	8855	2612	587	259	1464	
1260K					12708	2857	2541	14360	4236	952	420	2374	
1275G	125 x 75 (4.92 x (2.95))	M16	45 (1.77)	4 (.16)	43	3598	809	564	3187	1199	270	108	610
1275A					6656	1496	1043	5896	2218	499	200	1129	
1275K					10794	2427	1692	9562	3597	809	324	1831	

without prior notice.

# A-Mounts

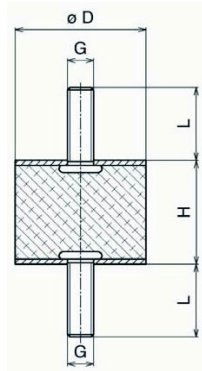

Part Number	Dia. x Height mm (Inch) (D) x (H)	Thread (G)	Length mm (Inch) (L)	Thickness mm (Inch) (S)	Quality NR  ShoreA Duro	Compression				Shear			
						Max. Static Load		Spring Rate Ks		Max. Static Load		Spring Rate Ks	
						N	lbs	N/mm	lbs/in	N	lbs	N/mm	lbs/in
1550G	150 x 50 (5.91) x (1.97)	M16	45 (1.77)	4 (.16)	43	8523	1916	2131	12043	2841	639	252	1424
1550A					57	15768	3545	3942	22279	5256	1182	466	2635
1550K					68	25569	5748	6393	36128	8523	1916	756	4272
1560G	150 x 60 (5.91) x (2.36)	M16	45 (1.77)	4 (.16)	43	6998	1573	1400	7912	2333	524	202	1142
1560A					57	12946	2910	2590	14637	4316	970	374	2112
1560K					68	20994	4720	4200	23735	6999	1573	606	3425
1575G	150 x 75 (5.91) x (2.95)	M16	45 (1.77)	4 (.16)	43	5779	1299	889	5024	1926	433	155	876
1575A					57	10691	2403	1645	9294	3563	801	287	1620
1575K					68	17337	3898	2667	15072	5778	1299	465	2628
15100G	150 x 100 (5.91) x (3.94)	M16	45 (1.77)	4 (.16)	43	4812	1082	535	3023	1604	361	112	633
15100A					57	8902	2001	990	5593	2967	667	207	1171
15100K					68	14436	3245	1605	9070	4812	1082	336	1899
2050G	200 x 50 (7.87) x (1.97)	M20	45 (1.77)	5 (.20)	43	20511	4611	5128	28979	6837	1537	448	2532
2050A					57	37945	8530	9487	53612	12648	2843	829	4684
2050K					68	61533	13833	15384	86938	20511	4611	1344	7595
2075G	200 x 75 (7.87) x (2.95)	M20	45 (1.77)	5 (.20)	43	12702	2856	1954	11042	4234	952	276	1560
2075A					57	23499	5283	3615	20429	7833	1761	511	2886
2075K					68	38106	8567	5862	33127	12702	2856	828	4679
20100G	200 x 100 (7.87) x (3.94)	M20	45 (1.77)	5 (.20)	43	10029	2255	1114	6295	3343	752	199	1125
20100A					57	18554	4171	2061	11647	6185	1390	368	2080
20100K					68	30087	6764	3342	18886	10029	2255	597	3374